




ELEVATION
(STRAIGHT SLOPE TYPE)

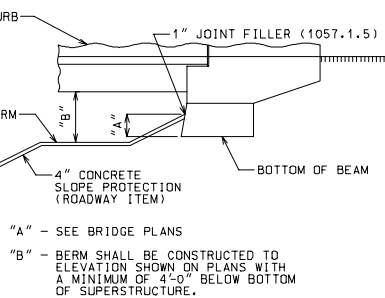

ELEVATION
(USE ON STRUCTURES WITHOUT
PASSIVE PRESSURE BERM)

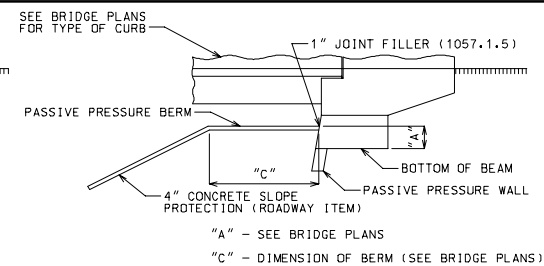


ELEVATION
(USE ON STRUCTURES WITH
PASSIVE PRESSURE BERM)



DETAIL "C"

NOTE: IF SLOPE PROTECTION FOOTING FALLS ON OR AROUND OTHER FOOTINGS, ONE LAYER OF 50# ROOFING FELT SHALL BE PLACED BETWEEN CONTACT SURFACES OF FOOTINGS.

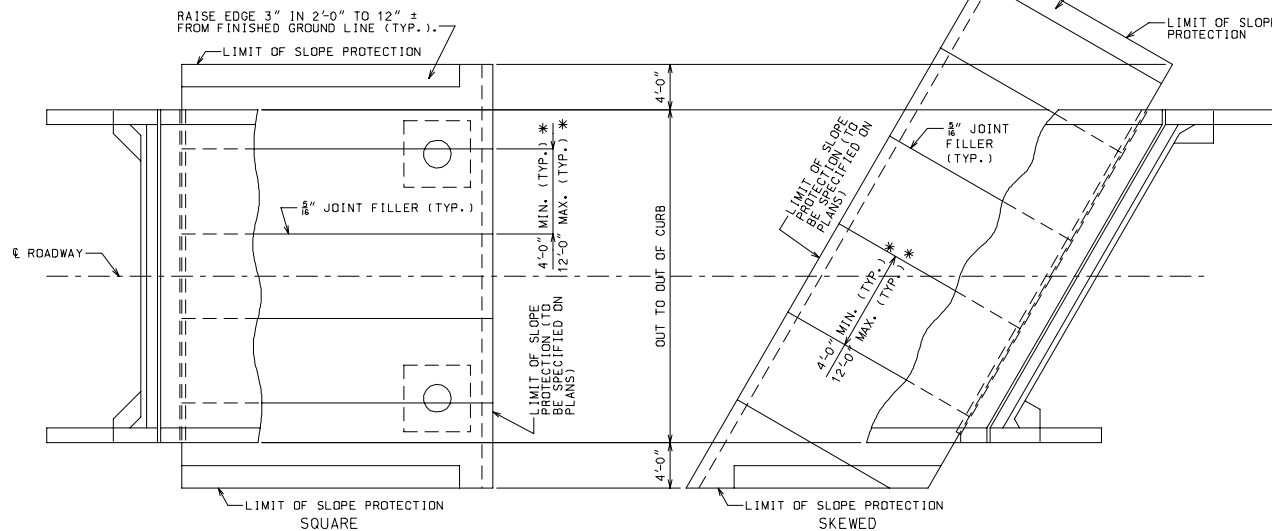

PART PLAN

(*) THE PROTECTION SHALL BE PLACED IN CONTINUOUS PANELS FROM TOE OF THE SLOPE TO THE TOP OF THE SLOPE.

NOTE:
SLOPE PROTECTION SHALL BE MADE CONTINUOUS BETWEEN STRUCTURES WHEN MEDIAN IS 60' OR LESS.
CONCRETE SLOPE PROTECTION SHALL BE FORMED AROUND ANY UNDISTURBED ROCK THAT IS PERMITTED TO REMAIN WITHIN THE SLOPE PROTECTION AREA.

MISSOURI HIGHWAY AND TRANSPORTATION COMMISSION			
CONCRETE SLOPE PROTECTION			
DATE _____	EFFECTIVE: 07-01-2001	611.60N	1/1